



GAU 2612

#7

v.24  
0-8-01Please type a plus sign (+) inside this box → ☐Approved for use through 10/31/2002. OMB 0651-0031.  
U.S. Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

<b>TRANSMITTAL FORM</b> <i>(to be used for all correspondence after initial filing)</i>	Application Number	09/700,530
	Filing Date	Nov 15, 2000
	First Named Inventor	W. SAGEFALK
	Group Art Unit	2612
	Examiner Name	N/A
Total Number of Pages in This Submission	Attorney Docket Number	STGUP008

ENCLOSURES (check all that apply)		
<input type="checkbox"/> Fee Transmittal Form	<input type="checkbox"/> Assignment Papers # (for an Application)	<input type="checkbox"/> After Allowance Communication to Group
<input type="checkbox"/> Fee Attached	<input type="checkbox"/> Drawing(s)	<input type="checkbox"/> Appeal Communication to Board of Appeals and Interferences
<input type="checkbox"/> Amendment / Reply	<input type="checkbox"/> Licensing-related Papers	<input type="checkbox"/> Appeal Communication to Group (Appeal Notice, Brief, Reply Brief)
<input type="checkbox"/> After Final	<input type="checkbox"/> Petition #	<input type="checkbox"/> Proprietary Information
<input type="checkbox"/> Affidavits/declaration(s)	<input type="checkbox"/> Petition to Convert to a Provisional Application	<input type="checkbox"/> Status Letter
<input type="checkbox"/> Extension of Time Request	<input type="checkbox"/> Power of Attorney, Revocation Change of Correspondence Address	<input checked="" type="checkbox"/> Other Enclosure(s) (please identify below):
<input type="checkbox"/> Express Abandonment Request	<input type="checkbox"/> Terminal Disclaimer	1. Submission of certified copy transmittal letter
<input type="checkbox"/> Information Disclosure Statement	<input type="checkbox"/> Request for Refund	
<input checked="" type="checkbox"/> Certified Copy of Priority Document(s)	<input checked="" type="checkbox"/> Return Receipt Postcard	
<input type="checkbox"/> Response to Missing Parts/Incomplete Application	Remarks	
<input type="checkbox"/> Response to Missing Parts under 37 CFR 1.52 or 1.53		

RECEIVED

OCT 05 2001

Technology Center 2600

SIGNATURE OF APPLICANT, ATTORNEY, OR AGENT	
Firm or Individual name	CARY & KELLY, LLP
Signature	 Reg. #: 36,764
Date	Aug 30, 2001

CERTIFICATE OF MAILING			
I hereby certify that this correspondence is being deposited with the United States Postal Service with sufficient postage as first class mail in an envelope addressed to: Commissioner for Patents, Washington, DC 20231 on this date: August 30, 2001			
Typed or printed name	Susan W. Xu		
Signature		Date	August 30, 2001

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

## IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re application of: W. SAGEFALK et al.

Attorney Docket No.: STGUP008

Application No.: 09/700,530

Examiner: n/a

Filed: 15 Nov 2000

Group: 2612

Title: A DIGITAL CAMERA HAVING  
PANNING AND/OR TILTING FUNCTIONALITY  
AND AN IMAGE ROTATING DEVICE FOR  
SUCH A CAMERA

RECEIVED  
OCT 05 2001  
Technology Center 2600

CERTIFICATE FIRST CLASS MAILING

I hereby certify that this correspondence is being deposited with the United States Postal Service with sufficient postage as first class mail in an envelope addressed to: Assistant Commissioner for Patents, Washington, DC 20231.

Date: August 30, 2001Signed: 

Susan W. Xu


SUBMISSION OF CERTIFIED COPY

Assistant Commissioner for Patents  
Washington, D. C. 20231

Sir:

As per 37 CFR 1.55, enclosed is a certified copy of the Swedish priority document (9901038-1 filed March 19, 1999) for the above referenced patent application. Do not hesitate to contact the undersigned if you should have any questions regarding this matter.

Respectfully submitted,

Date: August 30, 2001 Signed: 

Charles C. Cary  
Registration No. 36,764

CARY & KELLY, LLP  
1875 Charleston Road  
Mountain View, CA 94043

# PRV

PATENT- OCH REGISTRERINGSVERKET  
Patentavdelningen



Intyg  
Certificat

RECEIVED  
OCT 05 2001  
Technology Center 2600



Härmed intygas att bifogade kopior överensstämmer med de handlingar som ursprungligen ingivits till Patent- och registreringsverket i nedannämnda ansökan.

This is to certify that the annexed is a true copy of the documents as originally filed with the Patent- and Registration Office in connection with the following patent application.

(71) Sökande                      Axis AB, Lund SE  
Applicant (s)

(21) Patentansökningsnummer    9901038-1  
Patent application number

(86) Ingivningsdatum                      1999-03-19  
Date of filing

Stockholm, 2001-07-27

För Patent- och registreringsverket  
For the Patent- and Registration Office

  
Hjordis Segerlund

Avgift  
Fee            170:-

**PATENT- OCH  
REGISTRERINGSVERKET**  
SWEDEN

Postadress/Adress  
Box 5055  
S-102 42 STOCKHOLM

Telefon/Phone  
+46 8 782 25 00  
Vx 08-782 25 00

Telex  
17978  
PATOREG S

Telefax  
+46 8 666 02 86  
08-666 02 86

Ink. t. Patent- och reg.verket

1999 -03- 19

Huvudförfattaren Karsen

**A DIGITAL CAMERA HAVING PANNING AND/OR TILTING  
FUNCTIONALITY, AND AN IMAGE ROTATING DEVICE FOR SUCH A  
CAMERA**

5           **Technical Field**

The present invention relates to a digital camera having panning and/or tilting functionality, and more specifically to a digital camera having a camera housing with an optical input, such as a lens or objective, an  
10 image capturing unit and a controller. The invention also relates to an image rotating device for providing the panning and/or tilting functionality of such a digital camera.

15           **Background Art**

A common example of a digital camera with panning and/or tilting functionality is a web camera, which e.g. may be mounted at a given location for the purpose of surveillance, production monitoring, etc. The web camera  
20 comprises an optical input in the form of a lens or objective and an image capturing unit for producing a digital image from light received from the optical input. Usually, the image capturing unit comprises a CCD element (Charge Coupled Device). The web camera has software and  
25 hardware for allowing the camera to be connected to a given network, such as an Ethernet or Token Ring network. The web camera is arranged to produce digital images at a given rate, such as 1-25 images per second. In order to increase the visual volume covered by the web camera, the camera is  
30 provided with mechanical means for panning and/or tilting the camera. Generally speaking, "panning" means rotating the camera by a given angle (normally 0°-360°) in a horizontal plane, and "tilting" means rotating the camera by a given angle (normally 0°-180°) in a vertical plane.

35           In prior art web cameras the panning and/or tilting functionality is obtained by moving the whole camera or at

Ink. t. Patent- och reg.verket

1999 -03- 19

**Huvudföremål Kassen**

least the objective thereof. Since the camera and objective have a considerable weight, such an approach involves complex, large and expensive mechanics. Furthermore, the speed at which the camera may be panned or tilted is restricted due to the large mass, that has to be moved accordingly.

**Summary**

It is an object of the present invention to provide a digital camera, which allows faster and more accurate panning and/or tilting, thereby allowing the camera to produce more images per time unit. Furthermore, it is an object of the present invention to provide an image rotating device, to be mounted externally to the digital camera, for providing efficient and rapid panning and/or tilting functionality, without requiring large or expensive mechanics.

The above objects are achieved by providing the digital camera with an image rotating device having a mirror mounted externally to the camera housing and having a rotational member for rotating the mirror with respect to the optical input (lens or objective) of the camera housing in response to an angular displacement control signal received from a controller of the digital camera.

Other objects, features and advantages of the present invention will appear from the following detailed disclosure, from the appended claims as well as from the drawings.

**Brief Description of the Drawings**

A preferred embodiment of the present invention will now be described in more detail, reference being made to the accompanying drawings, in which:

1999-03-19

Huvudfaxen Kassar

FIG 1 is a schematic block diagram of the overall structure of a digital camera according to the preferred embodiment,

FIG 2 is a first sideview of the image rotating device and the camera, to which it is mounted,

FIG 3 is a second sideview of the image rotating device and the camera shown in FIG 2, and

FIG 4 is a topview of the image rotating device shown in FIGs 2 and 3.

#### Detailed Disclosure

Referring to FIG 1, a digital camera 300 is illustrated in a basic modular form. The digital camera 300 is arranged to produce one or several digital image(s) of a generic object 100, which may be any physical object that is present in a volume optically covered by the digital camera 300. An inventive image rotating device 200 is mounted externally to the digital camera 300 in front of an optical input 400 of the digital camera. The optical input 400 is a generally known lens or objective. The purpose of the image rotating device 200 is to extend the available field of view of the digital camera 300 in at least one plane, preferably in a horizontal plane as well as in a vertical plane. A preferred embodiment of the image rotating device 200 will be described in more detail with reference to FIGs 2-4.

As shown in FIG 1, the digital camera 300 further comprises an image capturing unit 500, which is provided with appropriate means for producing a digital image representative of the object 100. Preferably, the image capturing unit 500 comprises a CCD element (Charge Coupled Device), the internal structure of which is believed to be well-known to a man skilled in the art. The digital camera 300 also has a controller 600 for controlling the image capturing unit 500 as well as the external image rotating

Ink. t. Patent- och reg.verket

1999-03-19

Huvudföran Kassan

device 200. The controller 600 is operatively connected not only to the device 200 and the unit 500 but also to a digital memory 700 for storing images captured by the image capturing unit 500. Furthermore, the digital camera 300 may  
5 comprise an image transforming unit 800, the purpose of which is to rotate the digital image to compensate for image rotating effects caused by the image rotating device 200, when the field of view is panned or tilted. The image transforming unit 800 is responsive to an angle of rotation  
10 of the image rotating device 200 with respect to the objective 400 and uses this angle of rotation when transforming the digital image to compensate for the current pan and/or tilt angle. To perform such image transforming, i.e. to rotate a digital image in one or more than one direc-  
15 tion, is believed to be well within reach of a man skilled in the art of digital cameras. Therefore, the internal structure of the image transforming unit 800 will not be described herein.

The memory 700 may be implemented by any commercially  
20 available memory, such as an EEPROM memory.

As indicated in FIG 1, the digital camera 300 may be connected to a network 900, such as an Ethernet or Token Ring network, which in turn may be part of the Internet. In such an application, the controller 600 of the digital  
25 camera 300 is provided with appropriate software for allowing the digital camera 300 to act as a web camera available on the network 900, i.e. a web server that produces digital images.

The pan and/or tilt angle of the digital camera 300,  
30 or more specifically the angle(s) by which the image rotating device changes the field of view of the camera 300 with respect to a central axis of the objective 400, may be set and changed by a user of the camera by accessing the controller 600 through the network 900. Alternatively, the

STROM &amp; GULLIKSSON

990310 P:\PUBLIC\DOC\F\3333048.doc BA/13

Int. Patent- och reg.verket

5

1999-03-19

Huvudfaxen Kassar

pan and/or tilt angle(s) may be controlled from a computer directly connected to the digital camera 300.

A preferred embodiment of the image rotating device 200 will now be described in more detail with reference to 5 FIGs 2-4. The following elements are shown in these drawings:

Qty	Ref. No.	Name
1	19	Frame
1	18	Timing belt tightener
1	17	Belt wheel
1	16	Timing belt
1	15	Belt wheel
1	14	Timing belt
1	13	Timing belt tightener
2	12	Optical sensor
1	11	Mirror holder
1	10	Tilting mirror
1	9	Fixed mirror
1	8	Camera lens (objective)
2	7	Motor
1	6	Camera housing
1	5	Mirror wheel
1	4	Bevel gear
1	3	Tilt shaft
2	2	Fixing part
1	1	Guiding wheel

10 The image rotating device 200 has a mirror system, comprising a first fixed mirror 9 and a second tilting mirror 10. The fixed mirror 9 is mounted directly in front of the objective 8 at an angle of 37° relative to the



Ink. t. Patent- och reg.verket

1999-03-19

Huvudfaxen Kassar

optical center axis of the camera 300. The fixed mirror 9 is mounted to a mirror wheel 5, which is rotatable around the objective and hence provides a field of view with an angle of rotation of between  $0^\circ$  and  $360^\circ$ .

5 In the center of the field of view the tilting mirror 10 is mounted, so that the axis of rotation thereof is perpendicular to the optical center axis of the camera. The tilting mirror 10 is carried on the mirror wheel 5, thereby causing the tilting mirror 10 to rotate around the objective 8 together with the fixed mirror 9. Thanks to the geometrical arrangement of the mirrors 9 and 10 with respect to the objective 8, it is possible to monitor a large volume in a short time.

15 The tilting mirror 10 is attached to a mirror holder 11, which in turn is journaled in the mirror wheel 5 between two fixing parts 2. Opposite to the mirror wheel 5 a slightly smaller guiding wheel 1 is concentrically mounted. A tilt shaft 3 is eccentrically mounted to the mirror wheel, so as to cause the tilting mirror 10 to move. 20 The guiding wheel 1 transmits its motion to the tilt shaft 3 and from the tilt shaft 3 through a bevel gear 4 to the mirror holder 11. The arrangement resembles a planetary gear, where the guiding wheel represents a sun pinion and the tilt shaft represents a planet pinion. The mirror wheel 25 acts as holder of the planet pinion.

When the mirror wheel does not move, if the guiding wheel is rotated, the tilt shaft 3 will rotate around its own axis, wherein the mirror holder 11 will be rotated around its axis of rotation. Hence, the tilting mirror 10 30 is rotated with respect to the mirror wheel 5, and the center axis of the field of view will be angled with respect to the optical center of the camera. If the mirror wheel 5 and the guiding wheel 1 rotates at the same angular velocity, there will be no relative motion in the tilt 35 shaft and consequently no rotation of the mirror

Ink. t. Patent- och reg.verket

1999-03-19

Huvudföresen Kassen

holder/mirror around its axis of rotation. However, the mirror wheel 5 as a whole will rotate with the fixed mirror 9 and the tilting mirror 10 at a constant angle to the optical center axis of the camera.

5 In other words, by rotating the mirror wheel 5 and the guiding wheel 1 synchronously, the field of view may be rotated 360° for any given tilt angle. Then, if the wheels are rotated relative to each other, the angle of the mirror holder 11 will change, and the field of view may be again  
10 be rotated 360° for a new tilt angle. In this way, a very large volume around the camera may be covered, and images may be obtained for any given location within this large volume.

The mirror wheel 5 and the guiding wheel 1 are driven  
15 by respective motors 7. Belt wheels 15, 17, timing belts 14, 16 and timing belt tighteners 13, 18 are provided, as shown in FIGs 2-4.

The inventive image rotating device provides at least the following advantages:

- 20
- Low moment of inertia for rotating parts
  - High pan/tilt adjustment speed, short time between angular settings
  - High setting accuracy
  - Compact design

25

  - Few structural components
  - Low manufacturing cost
  - Flexible design
  - Simple pan/tilt control
  - Wide field of view

30 The present invention has been described above with reference to a preferred embodiment. However, other embodiments than the one disclosed herein are possible within the scope of the invention, as defined by the appended independent patent claims.

Ink. t. Patent- och reg.verket

1999-03-18

Huvudfaxen Kassar

## CLAIMS

1. A digital camera (300) having panning and/or tilting functionality, comprising: a camera housing (6) with an optical input (400), such as a lens or objective (8); an image capturing unit (500) for producing a digital image from light received through the optical input; and a controller (600), characterized by
- 5 a first mirror (9) mounted externally to the camera housing (6); and
- 10 an image rotating device (200), arranged to receive an angular displacement control signal from the controller (600) and in response rotate the first mirror at an angle with respect to the optical input (400, 8) of the camera housing (6).
- 15
2. A digital camera as in claim 1, further comprising an image transforming unit (800), operatively connected to the image capturing unit (500) and being arranged to rotate
- 20 the digital image, as captured by the image capturing unit, by an angle related to the angle of rotation of the first mirror (9).
3. A digital camera as in claim 1 or 2, further comprising a second mirror (10) mounted externally to the camera housing (6), wherein the image rotating device (200) is arranged to receive an angular displacement control
- 25 signal from the controller (600) and in response rotate the second mirror at an angle with respect to the optical input (400, 8) of the camera housing (6).
- 30
4. An image rotating device (200) for a digital camera (300) having a camera housing (6), an optical input (400), such as a lens or objective (8), and an image

STROM &amp; GULLIKSSON

990319 P:\PUBLIC\DOC\F\1313048.doc BA/13

Int. Patent- och reg.verket

9

1999 19

Huvudfaxen Kassar

capturing unit (500) for producing a digital image from light received through the optical input, characterized by a first mirror (9) mounted externally to the camera housing (6); and

- 5 a first rotational member (5, 7) for rotating the first mirror with respect to the optical input (400, 8) of the camera housing.

5. An image rotating device as in claim 4, further
- 10 comprising
- a second mirror (10) mounted externally to the camera housing (6); and
- a second rotational member (3, 7), arranged to receive an angular displacement control signal from the
- 15 controller (200) and in response rotate the second mirror at an angle with respect to the optical input (400, 8) of the camera housing.

1999 -03- 19

Huvudföres Kassen

**ABSTRACT**

A digital camera (300) has panning and/or tilting functionality and comprises: a camera housing (6) with an  
5 optical input (400), such as a lens or objective (8); an  
image capturing unit (500) for producing a digital image  
from light received through the optical input; and a  
controller (600). A first mirror (9) is mounted externally  
to the camera housing (6). An image rotating device (200)  
10 receives an angular displacement control signal from the  
controller (600) and rotates the first mirror at an angle  
with respect to the optical input (400, 8) of the camera  
housing (6).

15

To be published together with FIG 1

1999 -03- 19

Huvudföretag Kassar

1/4

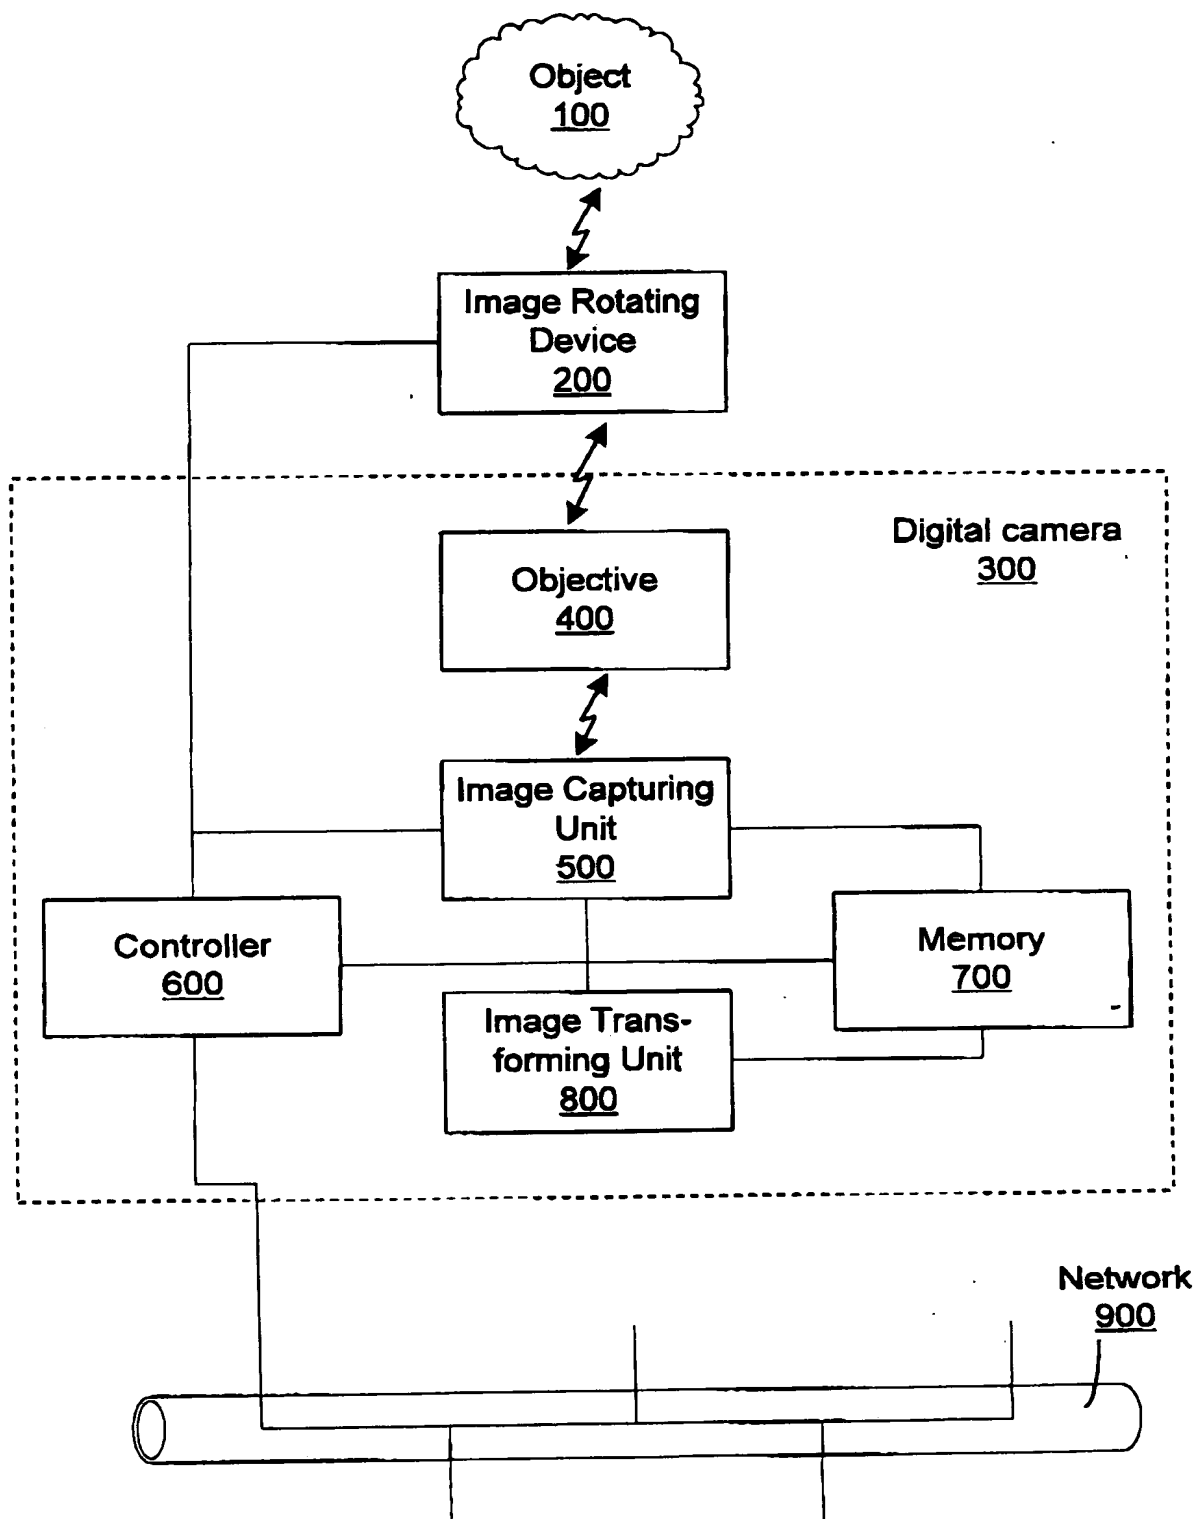


FIG 1

Int. t. Patent- och reg.verket

1999 -03- 19

Huvudföran Kassar

2/4

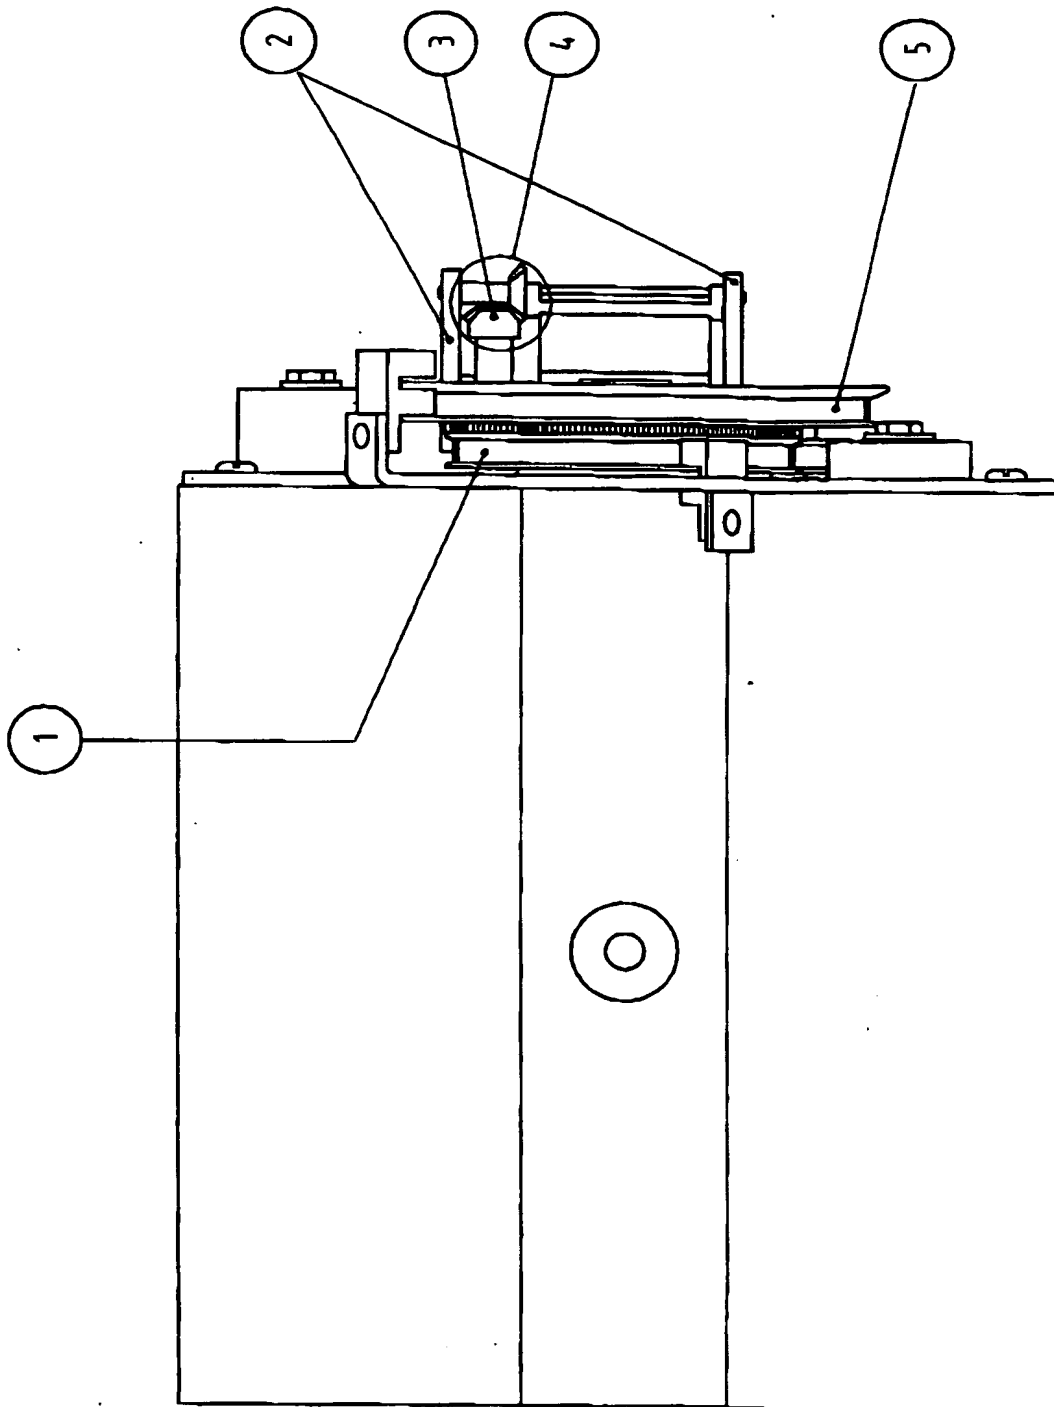


FIG 2

ank. t. Patent- och reg.verket

1999 -03- 19

Huvudföresen Kassan

3/4

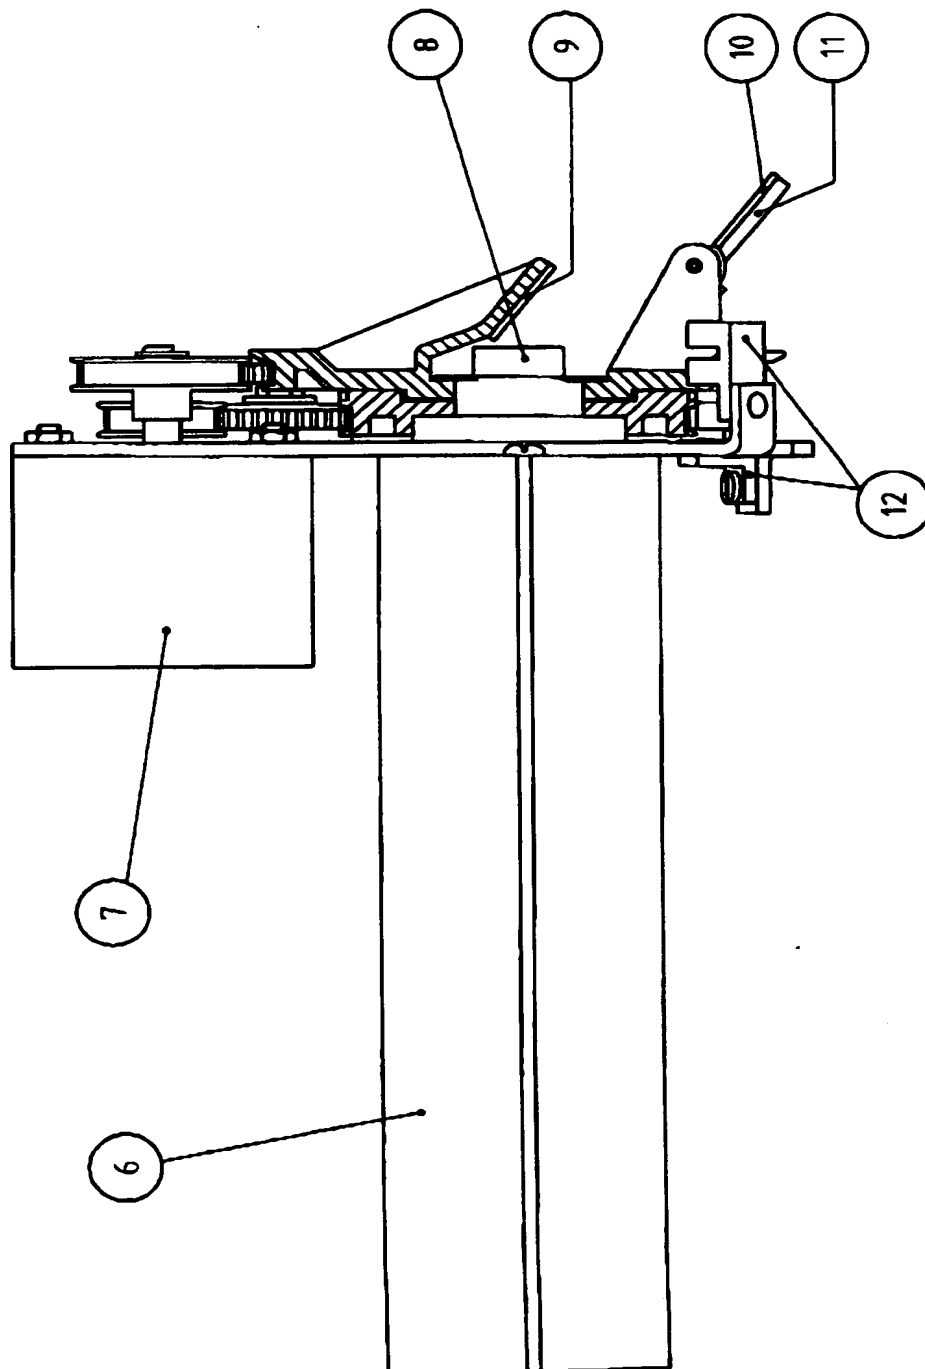


FIG 3



Ink. t. Patent- och reg.verket

1999 -03- 19

Huvudföran Kassa

4/4

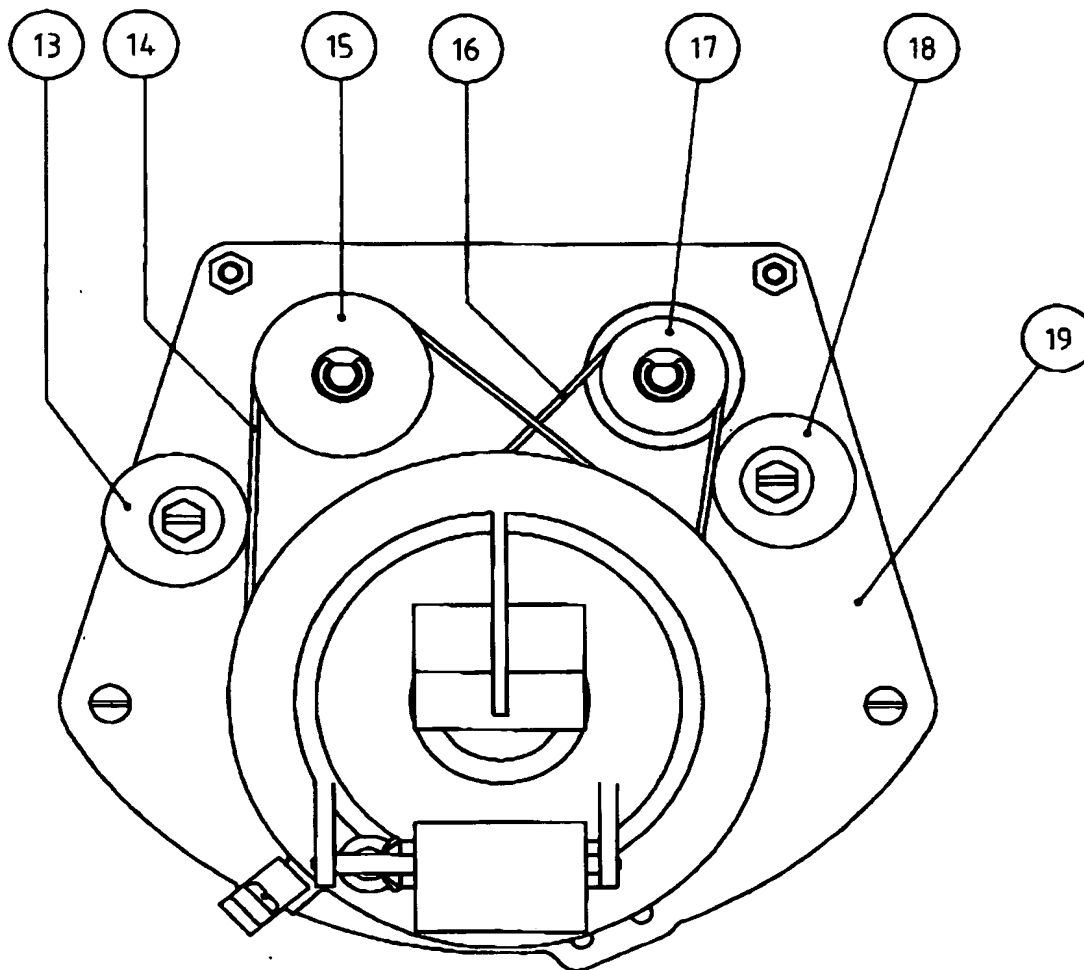


FIG 4